

Weber Tylon® QuickSet 6

6 Hour set adhesive for all tile types

Weber Tylon® QuickSet 6 is a cement-based, high strength, quick-set, thin to thick (3-20 mm) bed tile adhesive for the fixing of porcelain, ceramic, brick, clay, cement and natural stone tiles to walls and floors. Produced from carefully selected raw materials for consistency of product, it only requires the addition of water on site.

Performance

BETTER **QUALITY** BETTER
ECONOMIC **VALUE**



Easy to apply




Low VOC



Electrical Mixer



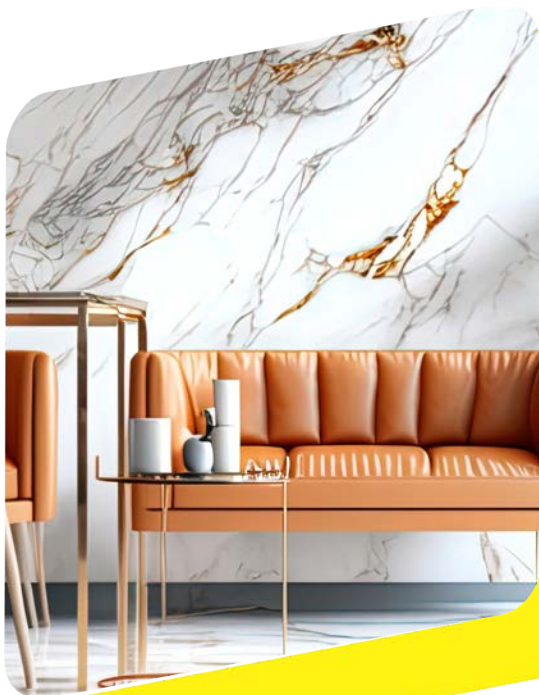

USES

Weber Tylon® QuickSet 6 is suitable for fixing Porcelain, Ceramic, Brick and Clay, Cement and natural stone tile to cement plaster, screeds, concrete and primed fibre cement surfaces.

- Suitable for interior and exterior use
- Suitable for use on walls and floors
- The 6-hour set makes it ideal for quick installations.
- Do not use this product on white or light coloured marble or porous porcelain tiles as it might cause discolouration of the tiles. **Weber Tylon® White** is recommended for this purpose

SUITABLE SURFACES

Weber Tylon® QuickSet 6 Is suitable to use on surfaces like:

- Cement-based plaster
- Cement screeds
- Concrete surfaces
- Primed fibre-cement surfaces

SURFACE PREPARATION

The following minimum curing periods should be observed before tiling commences:

- New concrete floors: 28 days
- New screeds: 28 days
- New brick walls: 28 days

The walls or floors to be tiled must be wood-floated and not steel-troweled or power-floated. Ensure that all surfaces are clean, dry, sound and free from dust, grease or any contamination that could impair bonding. Make good any unsound areas and remove flaky or peeling layers before tiling. Organic growth must be removed and the spores killed using household bleach. PVA paint and gypsum plaster must be chipped to expose 80% of the substrate. Enamel paint and bitumen should be scraped and chipped to expose 80% of the substrate. Do not use a solvent or heat to remove bitumen from the surface. Existing tiles must be thoroughly cleaned using a suitable cleaner. Rinse well with cold water. Smooth-, off-form-, shutter- or power floated cement surfaces should be acid washed to remove laitance. Rinse well with cold water. Once the surface preparation has been completed on the above problem surfaces, the area must be primed using a mix of 2 volumes of weber Plaskey and 1 volume of **Weber Tylon® Key-it**. Apply to a thickness of approximately 2 mm using a block brush. Leave to dry for 24 hours.

MIXING

- Combine a 20 kg bag of **Weber Tylon® QuickSet 6** with approximately 5 litres of clean water and mix to a creamy paste,
- In wet or permanently wet conditions, replace the water in the mix with **Weber Tylon® Bond-it**.
- Allow the mixture to mature for 5 minutes and re-mix thoroughly. The consistency can be adjusted by adding more water.
- Do not add too much water or attempt to extend the working time by adding more water as this will cause the adhesive to be weak with a tendency to crumble.
- Do not mix more adhesive than can be applied within 1 hour

APPLICATION

Spread adhesive using a notched trowel to a minimum bedded thickness of 3 mm on walls and 5 mm on floors. Heavily lugged, grooved or dove-tailed tiles must be buttered to fill any voids with adhesive before placing into wet adhesive. Press tiles firmly into wet adhesive with a twisting action. Use a rubber mallet to bed large or heavy tiles. Occasionally lift a tile to check that full contact is being made between the tile and the adhesive. Do not butt joint tiles. Clean excess adhesive off the surface once tiles are firmly set using a damp sponge. Once the adhesive has hardened, only mechanical removal is possible. Minimum grouting joints for walls is 2 mm and 3 mm for floors. Adhesive must be allowed to dry for 6 hours before grouting commences.

GROUTING

Ensure that the joints are free from tile adhesive and any other foreign matter. Allow 6 hours before grouting with **Weber Tylon® Tile Grout**. Allow 48 hours for sealed or non-porous surfaces. In wet or permanently wet conditions, replace the water in the mix with **Weber Tylon® Bond-it**.

COVERAGE

Depending of the nature and evenness of the surface and method of application, approximately 6 m² per 20 kg bag when applied using a 6 mm notched trowel (wall tiling) and 4 m² per 20 kg bag when applied using a 10 mm notched trowel, (floor tiling) i.e. based on a level/even floor.

PACKAGING

Weber Tylon® QuickSet 6 is supplied in 20 kg bags

STORAGE AND SHELF LIFE

When stored, unopened in a dry place at temperatures above 5 °C, shelf life is 9 months from date of manufacture

SAFETY INSTRUCTIONS

Contains cement, which is alkaline when wet and can cause skin irritation. Use eye protection and gloves and avoid prolonged skin contact. Avoid inhalation of dust. Wash skin contamination away with warm soapy water. Remove splashes to the eyes by prolonged irrigation and consult a doctor. Do not ingest.

TECHNICAL DATA

| | |
|------------------------------------|--|
| Initial setting time | approximately 3 hours |
| Final setting time Correction time | approximately 6 hours |
| Open time | approximately 20 minutes |
| Pot life | approximately 1 hour |
| Grouting time | approximately 6 hour |
| Water demand | approximately 5 litres per 20 kg |
| Temperature resistance | 70 °C |
| Application temperatures | Do not apply in temperatures below 5 °C or above 30 °C |

Note: all the data given was obtained at a temperature of 23 °C and 50% relative humidity. **Weber Tylon® QuickSet 6** is designed to meet the following SANS 52004 related performance values.

| | |
|--|-------------------------|
| Reaction to fire | Class A1/A1 |
| Initial tensile strength | > 1.0 N/mm ² |
| Tensile adhesion strength after heat aging | > 1.0 N/mm ² |
| Tensile adhesion strength after water immersion | > 1.0 N/mm ² |
| Open time: tensile adhesion strength (after no less than 20 min) | > 0.5 N/mm ² |

Weber Tylon® QuickSet 6

GUARANTEE

We agree that **Weber** products meet the product specifications and will be free from any defect. Any guarantee with regard to the performance of **Weber** products will be subject to its professional and practical application of **Weber** products in accordance with our instructions and specifications. However, we have no influence over specific site conditions and therefore, if in doubt, the user should first carry out sufficient tests to ensure that the product is suitable. In special cases, obtain advice. Should our product prove defective, we undertake to replace and defective material. This guarantee will fall away in the event of **Weber** products being contaminated by the addition of sand, cement or substance other than recommended by us.

TECHNICAL SERVICES

Weber has a team of experienced advisors available to provide technical support. Technical helpline: 08600 WEBER (93237) or visit www.za.weber.

VOC CONTENT:

TOTAL Volatile Organic Content < 10 g/litre of product
PARAMETER Results
VOLATILE ORGANIC COMPOUNDS CONTENT DATA
WEIGHT OF WATER % (Ww) <0.1 %

Reference
ASTM D4017-02
DENSITY OF PRODUCT (as per Technical Data Sheet)
1 g/ml (approximate)
WEIGHT OF TOTAL VOLATILES % (Wv) 0.2 % ASTM D2369-10
Calculated according to ASTM 3960-05 on ready to use product and including exempted solvents